



Coating Exterior Timber (Vertical) Surfaces

Painting vertical exterior surfaces can be a daunting and laborious task, especially when at times it seems the surface area that needs to be covered can be quite large.

TIMBRE PLUS VERTICAL (TPV) has been designed specifically for vertical application on both soft and hardwoods. This environmentally responsible, non-toxic, low odour, bio based, ecologically sustainable product has a teflon wax incorporated into the product that helps to aid beading and repel water. TPV contains UV absorbers which means it is UV resistant. This oil based, water reducible coating may be tinted to Quantum's range of transparent stain colours and ensures outstanding surface toughness.

Exterior vertical surfaces include such items as doors, windows, weatherboards, cladding, garage doors and even feature walls. When applying a finish it is important to properly prepare the surface area before applying the desired coating.

If applying TPV on new timber, begin by power washing the surface using SAP STRIP to remove all extractives and to sterilise any fungus or mould. This will also help to open up the timber and remove mill glaze to assist with penetration of the coating.



On the other hand, if applying TPV on older timber, it will require a wash with DEX PREP and a strong jet of water to rid the surface of oxidation (greying).

Apply the first coat of TPV liberally to allow penetration. Allow to dry. Follow up with two more coats, allow 4-6 hours dry time between coats.

If TPV has already been previously applied - to renew the finish, simply hose off dust, dirt or salt and apply one good coat of TPV. Note: if the coating has eroded back to bare timber then a timber cleaner will be required. For more information see our TIMBRE PLUS VERTICAL datasheet and label.



Facade Screen - TIMBRE PLUS VERTICAL

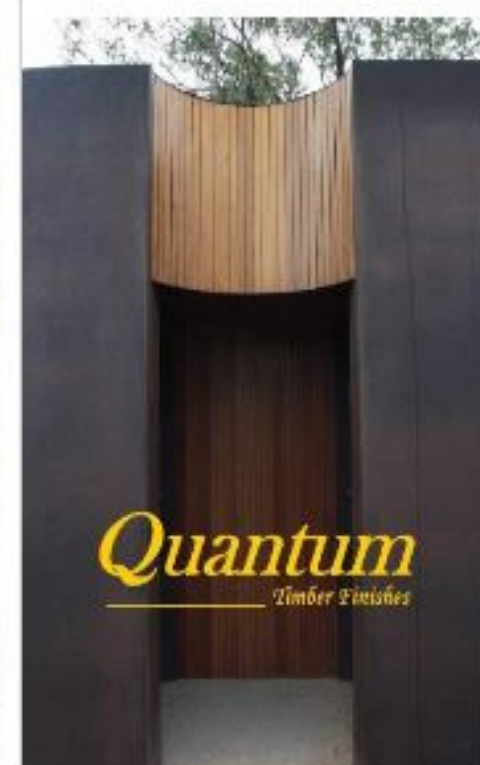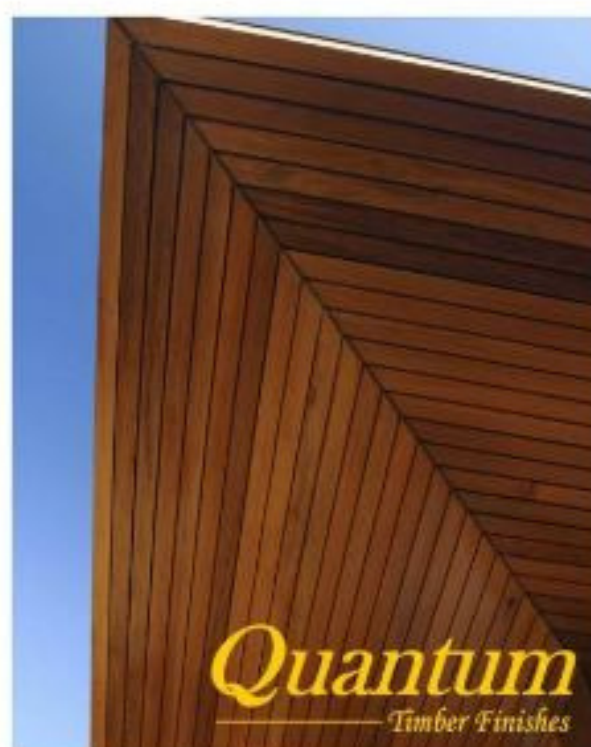

The information in this Technical Bulletin represents typical values. Application variables affect product performance therefore this information should be used as a guide. The user must satisfy themselves as to the suitability of this product for their requirements. Mirotone assumes no liability for use of this information.

